


Characteristic



- **Most Preferred Best Seller LED Strip (CE, UL, RoHS Certified)**
- DC12V high luminous flux SMD5730
- High brightness 55-60lm/LED
- Double layer copper FPC
- 3-LED per each cuttable 2" section

Physical

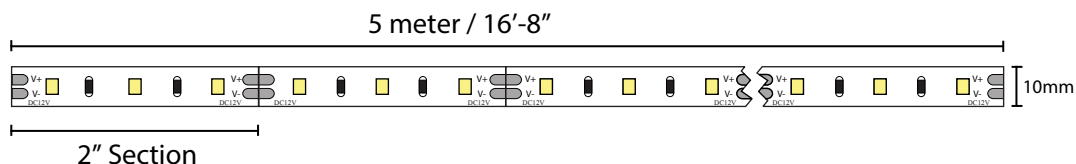

Parameters

Input Voltage	DC12V
LED Type	SMD5730
Power Factor	18watt / meter
Length per Roll	5meter / 16'-8"
Cuttable Section	2"
Qty of LED per Section	3
Luminous Flux	2,200lumen / meter
Color Temperature	6,000 kelvin
PCB* Width	10mm
Beam Angle	120 degree
CRI	≥80 / ≥90
Certificate	UL&CUL E486988,CE,RoHS
IP Rated	IP65

\*Printed circuit board