



Characteristics

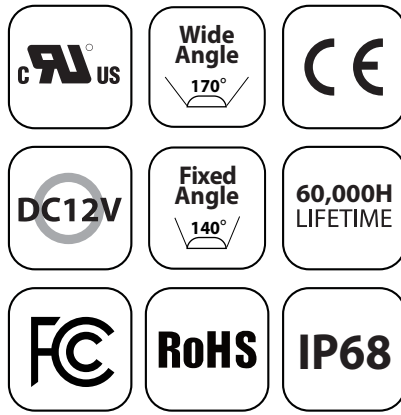

Distributed by Sunlux

Feature and Specifications

- Single/Double Sided Aluminum Retrofit Sticks for cabinets lighting
- Recommended use for cabinets with a depth of 6" to 12" from LED to the face
- UL Certified
- Wattage, view angle, lumens and color temperature will depend on the type of LED Module you use
- Color Rendering Index >80
- Input voltage: **12V**
- Use in: Cabinets lighting and pylon signs.

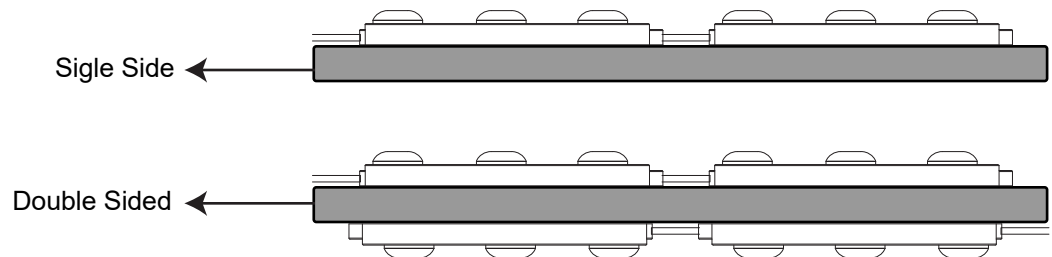

Optical and Physical Characteristics

Item Code	Size	Power Consumption	Lumens
STICK:F120	10Ft	57.2W	9,000 lm
STICK:F108	9.0Ft	52.0W	8,750 lm
STICK:F096	8.0Ft	46.8W	7,500 lm
STICK:F084	7.0Ft	41.8W	7,000 lm
STICK:F072	6.0Ft	33.8W	6,000 lm
STICK:F064	5.3Ft	30.0W	5,000 lm
STICK:F060	5.0Ft	28.6W	4,500 lm
STICK:F048	4.0Ft	23.4W	4,000 lm
STICK:F024	2.0Ft	11.7W	3,125 lm