

Characteristics

 CERTIFIED	160 lm/w
IP65	Selectable Wattage
DCL Premium	Input 120-277V
Dimmable 	Beam Angle: 98.1°





Distributed by Sunlux

Feature and Specifications


- Beam Angle: 98.1°
- IP65, Input Voltage 120-277Vac.
- Output Constant Current lever can be adjusted through output cable with 1-10V
- UV Stabilized polycarbonate lens
- Easy to install and operate
- Energy saving, long lifespan
- Soft and uniform light
- Green and eco-friendly without mercury
- Die-Cast Aluminum housing with powder coat finish
- Best use in, parking lots, factories, playgrounds, retail centers, warehouses, etc.

Dimensions

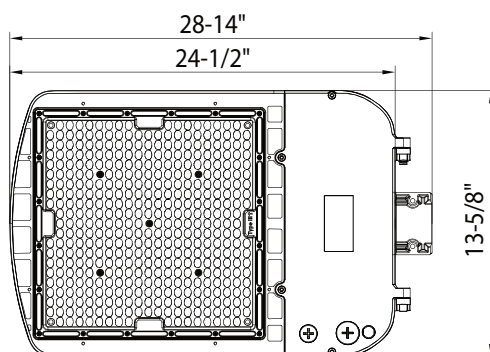


Weight: 14lbs.


Mounting Installation



Type A
Slip-fitter Mount



Type B
Direct Sided Mount



Type C
Trunnion Mount


Optical / Luminaire Characteristics

Model N°	SS-AR07-500W-H-TCP
Selectable Color (K)	3000/4000/5000K
Selectable Power (W)	300/450/500W
Efficacy (LPW)	UP to 160 lm/W ~ 80,000 lm
CRI	>80
Input Voltage	120-277V
Operating Temp	-40°F to 113°F

Notice For Use

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, please make sure the wiring section is insulated.
- Non-professionals, must not install and disassemble the lamps.


Accessories

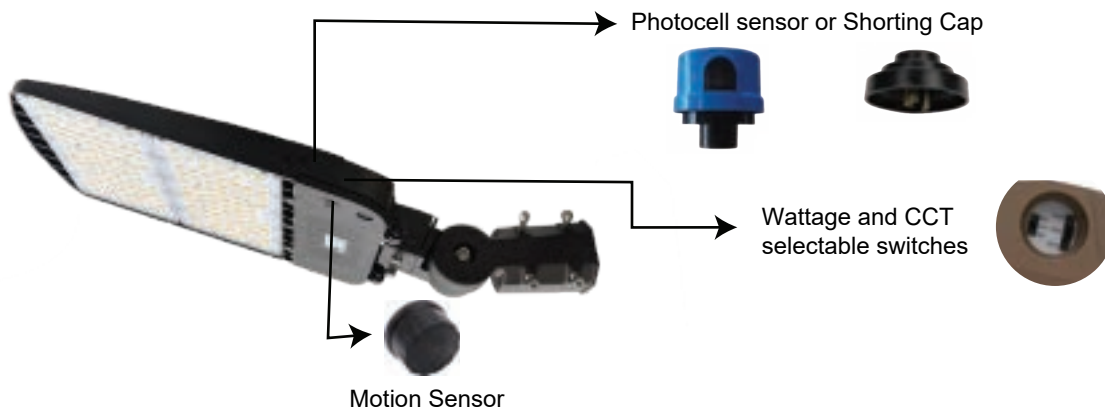


How to adjust

- Color Temp.
- Wattage

1. Use a screwdriver to unscrew the metal screw




2. Flip the color temperature switch to the desired color temperature, flip the power switch to the desired wattage. Then, use a screw to screw the metal screw.

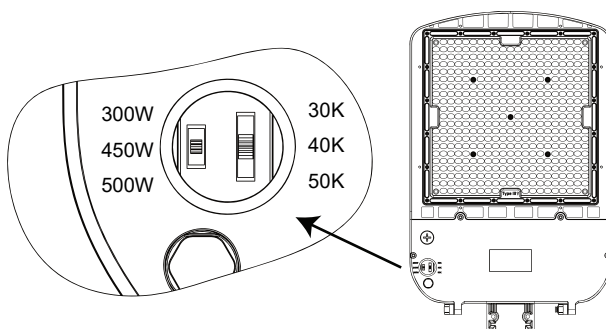


Motion Sensor Installation

1. Use a screwdriver to unscrew the metal screw



2. Screw the sensor by hand and screw it into the lamp.

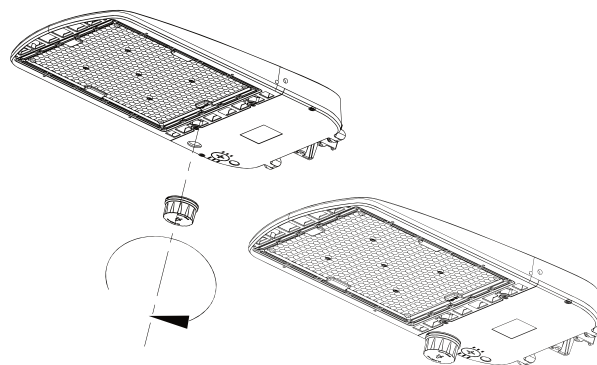

3. The sensor installation is completed, then check whether the sensor works properly