


Characteristic



- **Most Preferred Best Seller LED Strip (CE, UL, RoHS Certified)**
- DC12V high luminous flux SMD5050
- UL CE RoHS certified
- High CRI and brightness. Low decay. Long lifespan
- 3-LED per each cuttable 2" section

Physical

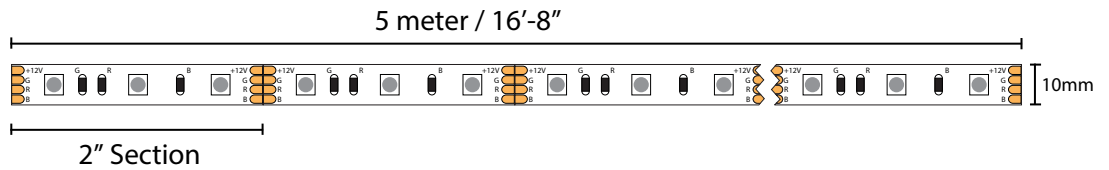

Parameters

Input Voltage	DC12V
LED Type	SMD5050
Power Factor	14.4watt / meter
Length per Roll	5meter / 16'-8"
Cuttable Section	2"
Qty of LED per Section	3
Color Temperature	6,000 kelvin
PCB* Width	10mm
Beam Angle	120 degree
CRI	≥80 / ≥90
Certificate	UL&CUL E486988, CE, RoHS
IP Rated	IP65

*Printed circuit board

Thermal

Operating temperature : -20~50°C
Storage temperature : -25~65°C

Waterproof Rating


IP65 : Protected against dust and water projected from a nozzle.

Approval


UL Certified E486988

Wiring Guide

Single Controller

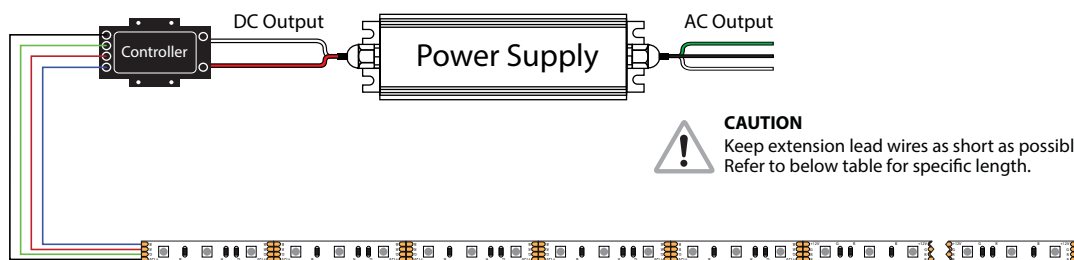

Parallel Connection with Signal Amplifiers

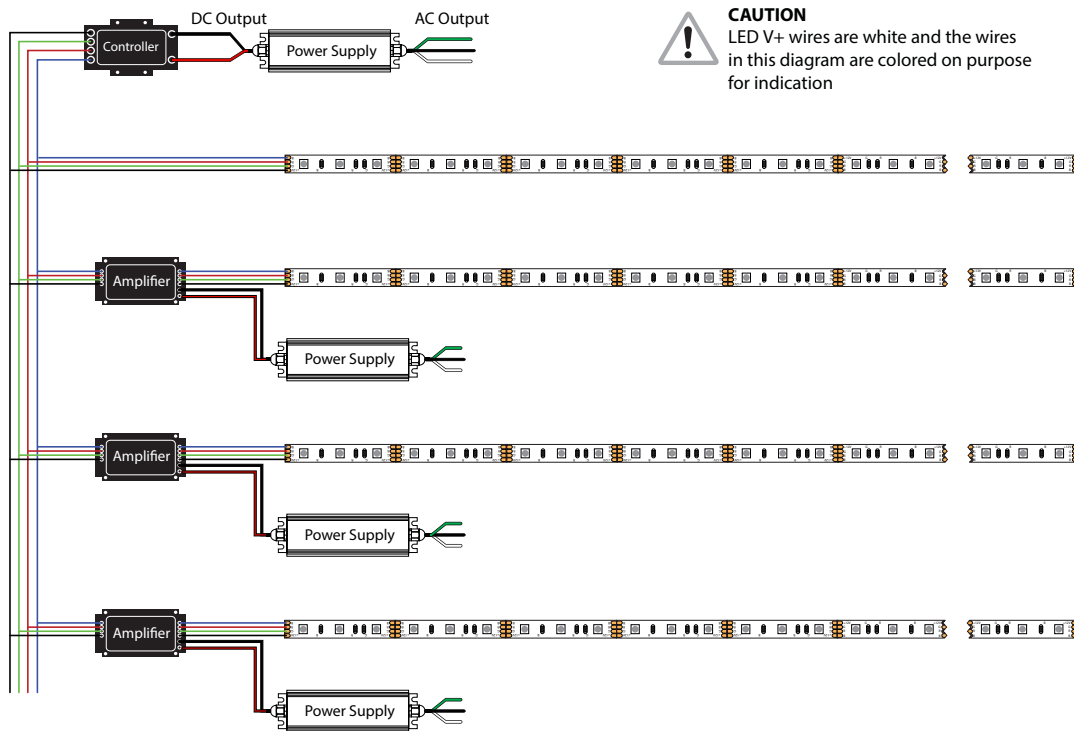

Specifications subject to change without notice


Elite LED Supply, Inc

8720 Westpark Dr Ste B TX 77063


Tel:713-234-6579 Fax:832-886-5256 www.eliteledsupply.com




Light Distribution

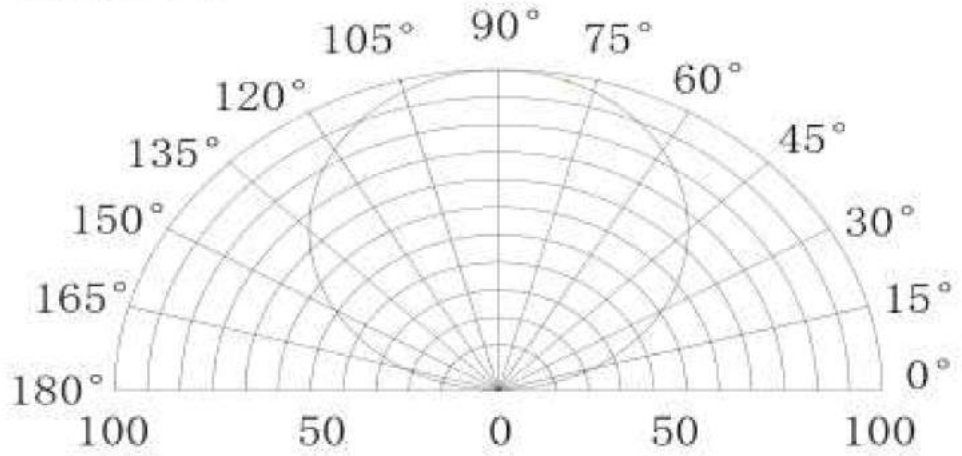

Relative Intensity (Colors)

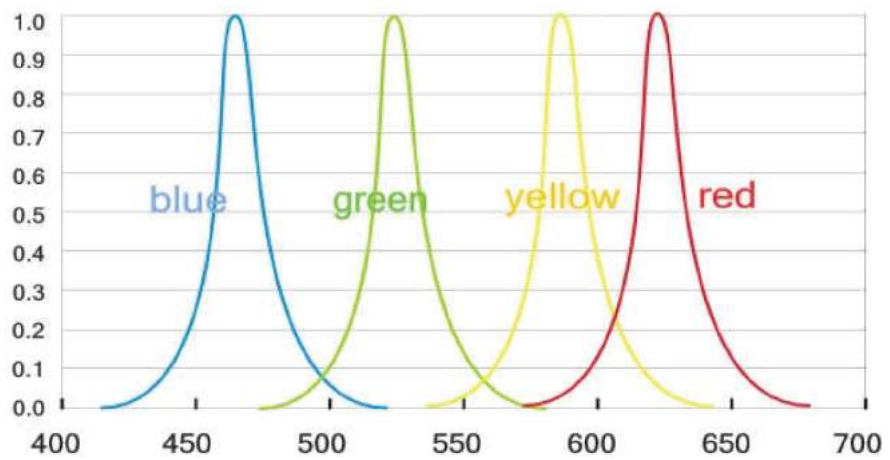

Relative Intensity (White)

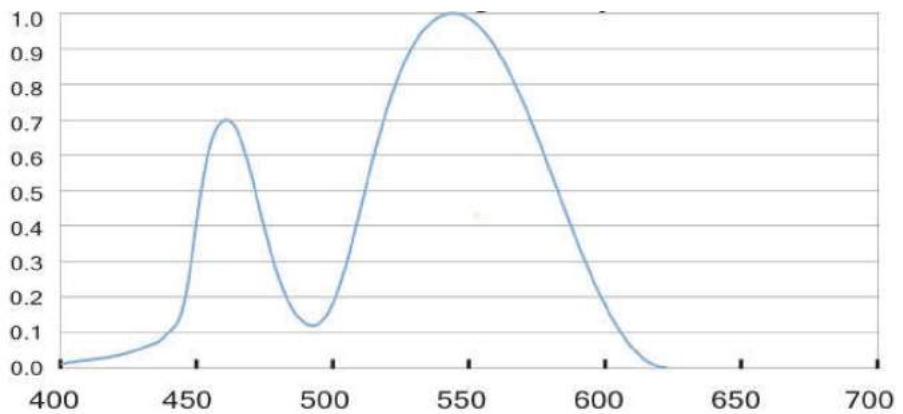

Specifications subject to change without notice