

Characteristics



Up to
135
lm/w



Selectable
Wattage



Input
120-277V





Distributed by Sunlux

Feature and Specifications

- IP65, Input Voltage 120-277Vac.
- UV Stabilized polycarbonate lens
- Easy to install and operate (Pendant mounting, surface mounting)
- Energy saving, life time > 50,000Hrs
- Soft and uniform light
- Green and eco-friendly without mercury
- Die-Cast Aluminum housing
- Best use in, parking garages, canopies, storage areas, outdoor aisles, etc.

Dimensions

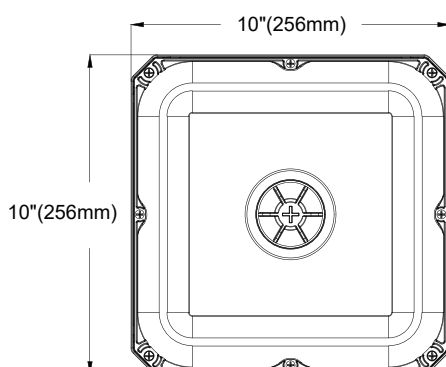

Weight: 5.78Lbs.

Optical / Luminaire Characteristics

Model N°	SS-CP75W-CS-3CCT
Selectable Color (K)	3000/4000/5000K
Selectable Power (W)	40/60/75W
Efficacy (LPW)	UP to 135 lm/W ~ 10,125 lm
CRI	>80
Input Voltage	120-277V
Operating Temp	(30°C to 50°C) ~ -22°F to 122°F
Sensor	Microwave motion sensor / PIR sensor photocell
THD	<20% (Total Harmonic Distortion)
Power Factor	≥ 0.95