



Characteristics

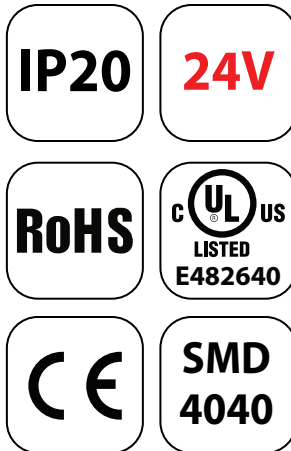

- **Most Preferred Best Seller LED Strip (CE, UL, RoHS Certified)**
- DC24V High luminous flux SMD4040
- High brightness 22-24lm/LED
- Double layer copper FPC (Flexible Printed Circuit)
- 6-LED per cutting section
- Cutting Section: 2.0 Inches

Physical

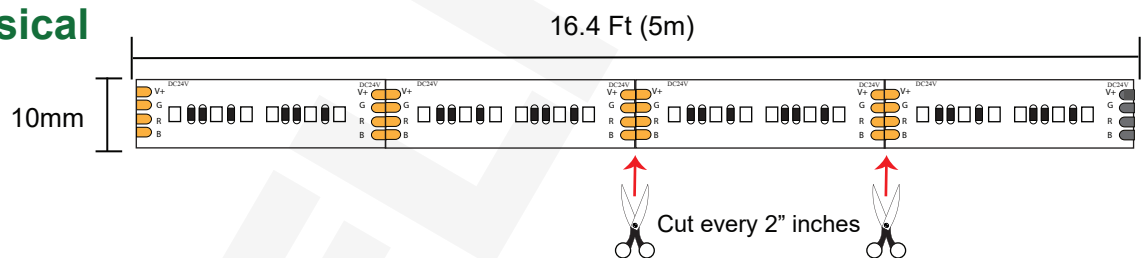

Technical Details

Input Voltage	24VDC
LED Chip	SMD 4040
Power Consumption	14.4W/m ~ 4.39W/ft
Length	5m/roll ~ 16.4ft/roll
Cutting Section	2.0 Inches
Available in	RGB (Changing Color)
PCB Width	10mm
CRI	>= 80 / >=90 (Color Rendering Index)
Protection Rating	IP20
Beam Angle	120° degree