



Characteristics




Distributed by Sunlux

Feature and Specifications

- Double Sided HO-Lamps for cabinets
- Recommended use for cabinets with a depth of 12" to 30"
- UL Certified
- Color Temperature: 6000K
- Color Rendering Index >80
- Input voltage: 110-277Vac., 50/60Hz
- Wattages and lumens vary depending on the size of the lamps.
- Use in: Cabinets lighting and pylon signs.



AC-N

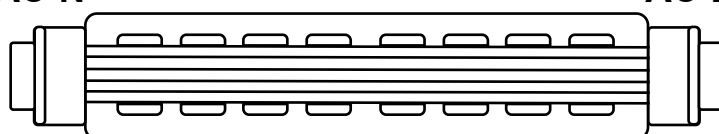

AC-L

Optical and Physical Characteristics

Item Code	Size	Power Consumption	Lumens
HOL BL F120-72W	10Ft	72W	9,000 lm
HOL BL F117-70W	9.7Ft	70W	8,750 lm
HOL BL F108-62W	9.0Ft	62W	7,500 lm
HOL BL F096-56W	8.0Ft	56W	7,000 lm
HOL BL F084-48W	7.0Ft	48W	6,000 lm
HOL BL F072-40W	6.0Ft	40W	5,000 lm
HOL BL F064-36W	5.3Ft	36W	4,500 lm
HOL BL F060-32W	5.0Ft	32W	4,000 lm
HOL BL F048-25W	4.0Ft	25W	3,125 lm
HOL BL F042-22W	3.5Ft	22W	2,750 lm
HOL BL F036-18W	3.0Ft	18W	2,250 lm
HOL BL F030-15W	2.5Ft	15W	1,875 lm
HOL BL F024-12W	2.0Ft	12W	1,500 lm
HOL BL F018-9W	1.5Ft	9W	1,125 lm